



ShenZhen Bang-Bell Electronics Co., Ltd.

LED Street Lights, LED Light Bulbs, LED Traffic Lights, Manufacturer, Supplier and Exporter since 1998.

LED Light Bulb – SP50

Apply to home, shopping center, conference room, display counter lighting and decoration, usually installed in the canister lamp case (minimum 2.5 inch).

Model Name	LED Light Bulb
Model No.	SP50
Power Consumption	3W
Working Voltage	12/24VDC; 100-240VAC, 50/60Hz
Life Span	>50,000 Hours
Base	E27/E26/E17/E14/E12/GU10
Certificates	CE
MOQ	10 pcs
Payment Term	T/T, L/C
Warranty	36 Months
[Download PDF Spec.]	



Main Specifications:

Model Number	SP50
Model Name	LED Light Bulb
Dimension	Φ50 x 71mm
Emission Color	Pure White, Warm White (Red, Yellow, Green and Blue optional)
Color Temperature	Pure White: 5,000 – 7,000K, Warm White: 3,000 – 4,000K
CRI	Pure white: Ra _{AA} 75, Warm white: Ra _{AA} 70
Luminescence Angle	30°
Lumens Flux	Pure White: 210 lm, Warm White: 175lm
Working Voltage	100-240VAC or 12V DC
Power Consumption	3W
Lamp Lens	Acryl
Lamp Cup Radiator	Alloy Aluminum Plating
Lamp Base	E27, E26, E17, E14, E12, Gu10
Certification	CE
Packing	1 pc/White Box, 10 pcs/Middle Box, 100 pcs/Carton
Carton Size	584 x 458 x 372 mm
Container Q'ty (pcs)	20'Q: 28,800 pcs 40'Q: 60,000 pcs, 40'HQ: 70,000 pcs






Photometric Performance

The beam pattern can be controlled within 30 degrees, reducing the brightness loss furthest, applying with different topical lighting requirements, can be used for Office, Commercial and Home lighting.

◆ The Different Height Illumination Distribution

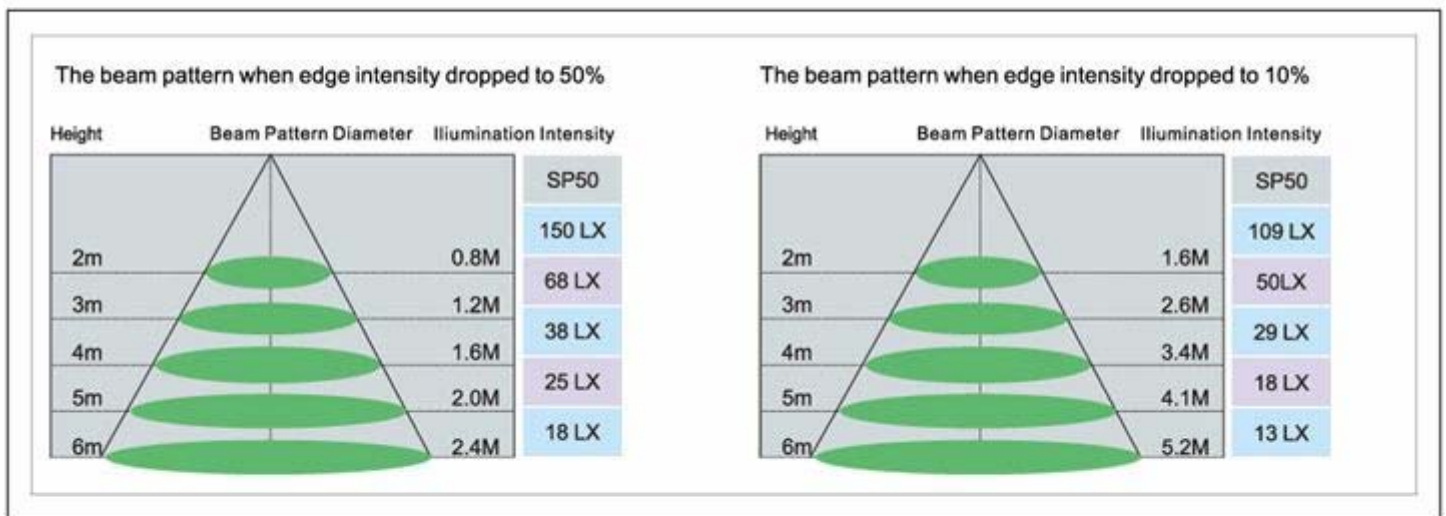

◆ Plane Equiluminous Distribution (Beam Pattern) ◆ Distribution Curve

